


Ark[®]nt ARK-W30ILD Black

CONSTRUCTION:

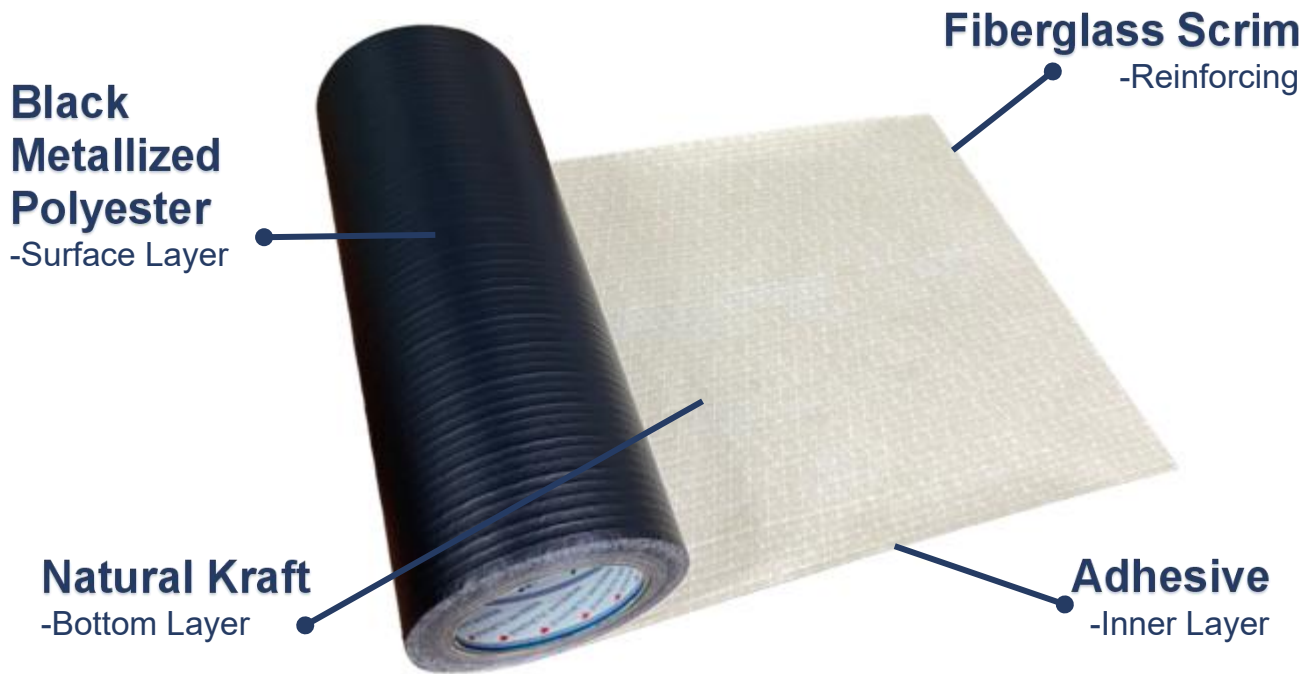

ARK-W30ILD Black delivers corrosion resistance, durable flame retardancy, and performs well under high and low temperatures.

SAMPLE:





VAPOUR BARRIER SYSTEM

Polyester / Scrim / Kraft (ARK-W30ILD Black)

FACING COMPOSITION	DESCRIPTION	VALUES (ENGLISH)	VALUES (METRIC)
Black Film	Metallized Polyester	13 lbs / 3000 ft ²	21 g/m ²
Adhesive	Flame Resistant		
Reinforcing	Tri-Directional Fiberglass	5 / inch (MD) 5 / inch (XD)	20 / 100mm (MD) 20 / 100mm (XD)
Kraft	Natural	15 lbs / 3000 ft ²	25 g/m ²

PHYSICAL PROPERTIES	TEST METHOD	VALUES (ENGLISH)	VALUES (METRIC)
Basis Weight	Scale	21 lbs / 1000 ft ²	101 g/m ²
Permeance (WVTR)	ASTME96/ProcedureA	0.02 perm	1.15 ng/N.s
Tensile Strength	ASTM D828	49 lbs/inch (MD) 40 lbs/inch (XD)	8.6 kN/m (MD) 7.0 kN/m (XD)
Thickness	Micrometer Caliper	0.007 inch	170 micron
Fire Rating	ASTM E84	Class A	Class A
Accelerated Aging	ASTM C1258 30 Days @ 95% RH, 120°F (49°C)	No Corrosion No Delamination	No Corrosion No Delamination
Low Temperature Resistance	ASTM C1263 4 hours at -20°F (-29°C)	Remains Flexible No Delamination	Remains Flexible No Delamination
High Temperature Resistance	ASTM C1263 Modified 4 hours at 240°F (116°C)	Remains Flexible No Delamination	Remains Flexible No Delamination
Water Immersion	24 hours @ 73°F (23°C)	No Delamination	No Delamination
Dimensional Stability	ASTM D1204	0.25%	0.25%
Light Reflectance	ASTM C523	85%	85%

TECHNICAL SERVICES

Tel: +1 7783251557

info@arksynthetics.com

www.arksynthetics.com